














Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 I/ h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
F200 C A	 2108	770	10	11.1	6.4	75	165	85	187	0.5	
F200 C W	 2108	650	10	9.0	66.2	75	165	85	187	0.36	

24h Produzione Ghiaccio - Ice Production

Raffreddamento ad Aria - Air Cooled Unit


Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	172	186	193	200
50°	379	410	425	441
21°	152	166	173	180
70°	335	366	381	397
32°	136	151	158	165
90°	300	333	348	364
38°	125	139	146	153
100°	276	306	322	337

Raffreddamento ad Acqua - Water Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	170	184	191	200
50°	375	406	421	441
21°	162	176	183	190
70°	357	388	403	419
32°	152	166	173	180
90°	335	366	481	397
38°	130	144	151	158
100°	287	317	333	348



PANNELLO DI CONTROLLO - CONTROL PANEL

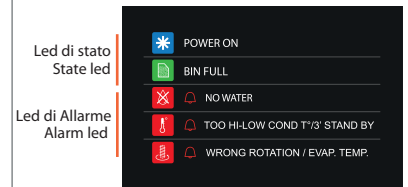

CAPACITA' DEPOSITO - BIN CAPACITY

50 Kg - 110 lbs


DIMENSIONI - DIMENSIONS

WxDxH (mm / inch)

700 x 616 x 995
27 9/16" x 24 4/16" x 39 3/16"

760 x 680 x 1070
29" 15/16 x 26" 12/16 x 42" 2/16

TIPO GHIACCIO - ICE TYPE



PERCENTUALE ACQUA RESIDUA 25%
ICE CONTAINS 25% RESIDUAL WATER






CONDIZIONI USO-OPERATING REQUIREMENTS

Calore espulso / Rejected Heat 2865 W

Volume aria / Air Volume 450 m³/h



220-240/1/50Hz R134a GWP=1430

MIN		MAX
30 µS/cm		500 µS/cm
10°C (50°F)		40°C (104°F)
10°C (50°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)

