














## Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 I / h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
M132 A		1637	850	10	15.9	7.0	53	117	65	143	1,96
M132 W		1637	750	10	12.1	107.0	53	117	65	143	1,76

## Produzione Ghiaccio - Ice Production


### Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>129</b>	<b>147</b>	<b>150</b>	<b>154</b>
50°	284	323	330	340
21°	<b>112</b>	<b>127</b>	<b>133</b>	<b>138</b>
70°	247	281	239	305
32°	<b>96</b>	<b>107</b>	<b>110</b>	<b>113</b>
90°	212	236	242	249
38°	<b>79</b>	<b>87</b>	<b>95</b>	<b>98</b>
100°	173	193	209	215


### Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>123</b>	<b>131</b>	<b>134</b>	<b>136</b>
50°	271	289	295	300
21°	<b>111</b>	<b>121</b>	<b>126</b>	<b>128</b>
70°	245	267	278	282
32°	<b>102</b>	<b>110</b>	<b>117</b>	<b>119</b>
90°	225	243	258	262
38°	<b>100</b>	<b>108</b>	<b>115</b>	<b>116</b>
100°	221	238	254	256


Vista frontale  
Front view




Vista laterale  
Lateral view





Vista superiore  
Top view



AIR COOLED





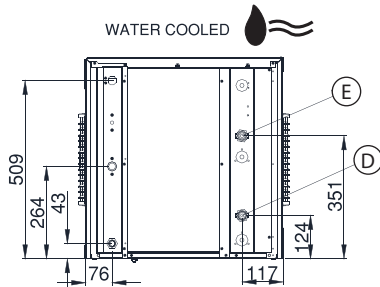



WATER COOLED



- A** Water drain Ø20 mm
- B** Potable water inlet 3/4 GAS
- C** Electrical cable supply
- D** Water cooled inlet 3/4 GAS
- E** Water cooled outlet 3/4 GAS



### PANNELLO DI CONTROLLO - CONTROL PANEL

	Alimentazione Powered
	In Funzionamento Operating
	Deposito Pieno/Lavaggio Storage Full / Washing
	Allarme Alarm
	Allarme Alta Pressione High Pressure Alarm
	Pulsante Reset/Lavaggio Button Reset/Washing




### DIMENSIONI - DIMENSIONS

LxPxH(mm): 560 x 620 x 575  
WxDxH(in): 22" x 24 7/16" x 22 10/16"



### DEPOSITO - SLOPE BIN

D105-D155-D205-D255(KM205-255)

### TIPO GHIACCIO - ICE TYPE

	<b>HALF-LARGE</b> 10 x 29 x 24 - 6 gr <b>265</b> PZ. / CICLO PCS / CYCLE
	<b>DICE</b> 22 x 22 x 24 - 10 gr <b>168</b> PZ. / CICLO PCS / CYCLE
	<b>LARGE</b> 29 x 29 x 24 - 17 gr <b>110</b> PZ. / CICLO PCS / CYCLE

### CONDIZIONI USO-OPERATING REQUIREMENTS

	220-240V / 1 / 50Hz		R452A GWP=3922
<b>MIN</b>	10°C (50°F)	<b>MAX</b>	40°C (104°F)
	5°C (41°F)		35°C (95°F)
	- 10 %		+ 10 %
	1 BAR (14 PSI)		5 BAR (70 PSI)
Calore espulso - Rejected Heat		<b>1731 W</b>	
Volume aria - Air Volume		<b>590 m³/h</b>	

M132 220 - 240 V 50Hz - Modular Ice Makers