














Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 l / h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
M202 A		2348	1100	16	14.8	12	70	154	85	187	2,75
M202 W		2348	1000	16	10.6	128	70	154	85	187	1,96

24h Produzione Ghiaccio - Ice Production


Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	185	215	230	240
50°	408	474	507	529
21°	175	200	215	220
70°	386	441	474	485
32°	135	155	160	165
90°	298	342	353	365
38°	120	133	138	140
100°	265	293	302	309


Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	175	200	215	220
50°	386	441	474	485
21°	170	195	210	215
70°	375	430	463	474
32°	160	185	192	197
90°	353	408	423	434
38°	155	180	185	190
100°	342	397	408	419


Vista frontale
Front view




Vista laterale
Lateral view





Vista superiore
Top view



AIR COOLED 

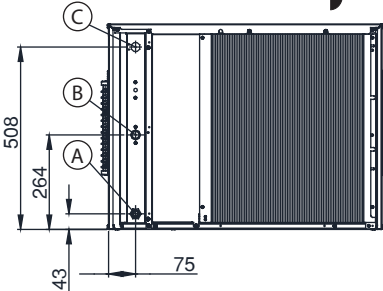



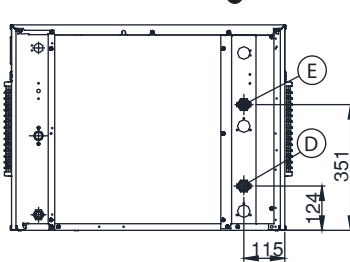



WATER COOLED 



- A** Water drain Ø20 mm
- B** Potable water inlet 3/4 GAS
- C** Electrical cable supply
- D** Water cooled inlet 3/4 GAS
- E** Water cooled outlet 3/4 GAS



PANNELLO DI CONTROLLO - CONTROL PANEL

	Alimentazione Powered
	In Funzionamento Operating
	Deposito Pieno/Lavaggio Storage Full / Washing
	Allarme Alarm
	Allarme Alta Pressione High Pressure Alarm
	Pulsante Reset/Lavaggio Button Reset/Washing


DIMENSIONI - DIMENSIONS

LxPxH(mm): 760 x 620 x 575
WxDxH(in): 29.15/16"x24.7/16"x22.10/16"

DEPOSITO - SLOPE BIN

D205 - D255 - D305 (KM305)
D405 (KFM404)-D505 (KFM505)


TIPO GHIACCIO - ICE TYPE



HALF-LARGE
10 x 29 x 24 - 6 gr

370


PZ. / CICLO PCS / CYCLE



DICE
22 x 22 x 24 - 10 gr

234

PZ. / CICLO PCS / CYCLE



LARGE
29 x 29 x 24 - 17 gr

140

PZ. / CICLO PCS / CYCLE

CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 1 / 50HZ R452A GWP=3922

MIN	MAX
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
- 10 %	+ 10 %
1 BAR (14 PSI)	5 BAR (70 PSI)

Calore espulso - Rejected Heat **2432 W**
Volume aria - Air Volume **590 m³/h**